



# UAVs and UAV Swarms for Civilian Applications: Communications and Image Processing in the SCIADRO Project

Manlio Bacco<sup>1</sup>, Stefano Chessa<sup>2</sup>, Marco Di Benedetto<sup>1</sup>, Davide Fabbri<sup>3</sup>,  
Michele Girolami<sup>1</sup>, Alberto Gotta<sup>1</sup>(✉), Davide Moroni<sup>1</sup>,  
Maria Antonietta Pascali<sup>1</sup>, and Vincenzo Pellegrini<sup>3</sup>

<sup>1</sup> Institute of Information Science and Technologies (ISTI) of National Research Council (CNR), via G. Moruzzi, 1, Pisa, Italy

{manlio.bacco,marco.dibenedetto,michele.girolami,alberto.gotta,  
davide.moroni,maria.antonietta.pascali}@isti.cnr.it

<sup>2</sup> Department of Computer Science, University of Pisa, Pisa, Italy

stefano.chessa@unipi.it

<sup>3</sup> I.D.S. S.p.A., via E. Calabresi, 24, Pisa, Italy

{v.pellegrini,d.fabbri}@idscorporation.com

**Abstract.** The use of unmanned aerial systems is increasingly common in both research and industrial fields. Nowadays, the use of single unmanned aerial vehicles is quite established and several products are already available to consumers, while swarms are still subject of research and development. This work describes the objectives of a research project, namely *SCIADRO*, which deals with innovative applications and network architectures based on the use of single unmanned aerial vehicles and of swarms in several civilian fields.

**Keywords:** UAV · Swarm · Multipath · Crowd-sensing · Imaging

## 1 Introduction

Nowadays, Unmanned Aerial Vehicles (UAVs) are attracting a lot of attention from industrial and research fields. They are suited to a large number of applications, thus making them of interest for commercial and research purposes. The use of a single UAV provides several services to consumers and to industry because of the low-cost and the reliability that UAVs can provide. In those applications, UAVs are typically used in a Line of Sight (LoS) fashion, i.e., the pilot can Command and Control (C2) the UAV from the ground without losing sight of it. In fact, national regulamentation are quite severe because of safety reasons, and the use of UAVs for civilian applications must adhere to them, thus making their use more common outside of urban areas. An upcoming scenario for UAVs, quite challenging, is the use of *swarms*, or Flying Ad-Hoc Networks (FANETs): several drones, from tens to hundreds, jointly used in order to execute a given task. The joint use of multiple UAVs poses several challenges that

must be met, and the SCIADRO<sup>1</sup> research project deals with some specific application scenarios involving the use of swarms. As pointed out in [1–3], the number of application scenarios for UAVs is rapidly increasing, involving power line inspection, monitoring of cultural heritage sites, environmental monitoring, fire and gas detection, as well as precision agriculture. Several advantages can be brought by the use of multiple UAVs in those scenarios: for instance, it is likely that the overall cost of acquisition and maintenance of several small UAVs can be lower than the overall cost of a single large UAV needed for the same task [4]. Furthermore, fault-tolerance is inherently provided by the use of swarms, because a single drone can be removed with a limited impact on the overall formation. Swarms can also provide scalability, i.e., adding or removing drones from a swarm, in order to better adapt to changing conditions or to simply replace one or more UAVs experiencing issues or just battery depletion.

The rest of this paper is organized as follows: Sect. 2 provides a brief overview of the state of the art. Then, Sect. 3 describes the main application scenarios considered in the SCIADRO project, also proposing several approaches. Eventually, the Conclusions are in Sect. 4.

## 2 Related Works

A wide range of applications can benefit from the use of UAVs, as in [1–3], such as power lines inspection, monitoring of cultural heritage sites, environmental monitoring. In particular, precision agriculture is largely benefiting of the use of UAVs [5], due to low operational costs, high operational flexibility and high spatial resolution of imagery. The use of UAVs in this field is expected to grow faster in the next years and it has proved to be particularly effective in otherwise impervious areas, or each time their use can remove the need for expensive temporary scaffolding, such as in the case of the inspection of historical or cultural areas and buildings. In the latter scenarios, UAVs are typically equipped with the needed sensors in order to facilitate any inspections: for instance, cameras, but also short-range communication radios, in order to collect data from previously installed sensors or to deliver commands, in the case of actuators. A survey of UAV usage for imagery acquisition in the field of disaster research and management is provided in [6]. The authors focus on the inspection of pipelines, in order to quickly provide damage survey thanks to UAVs. In fact, they provide a low-cost solution for imagery collection, and the small size and maneuverability makes UAVs a viable and low-cost option.

The use of UAV swarms, on the other side, is less established than the use of single UAVs. This depends on the issues that the contemporary use of multiple drones poses to C2, among other issues, in order to avoid any collisions among the members of the swarm, or the need of intelligent algorithms to exchange data, coordinate the swarm, and process collected/generated data. From the network perspective, an UAV swarm is typically referred to as FANET. A FANET has

---

<sup>1</sup> SCIADRO is the acronym of *SCI*Ame di *DR*Oni, which translates into *UAV swarm*.

distinctive features w.r.t. other networks: a high mobility degree, a flight formation, and average and peak movement speeds of that must be carefully taken into account. For instance, aerial mobility experiences less constraints than the terrestrial one, but higher speeds are expected. Nonetheless, their use is attracting the attention of both the industrial and the scientific world in several fields [1, 6, 7], and this work proposes several civilian applications that can largely benefit of the use of UAV swarms.


### 3 The SCIADRO Project

Co-funded by the Tuscany region, Italy, the SCIADRO project aims at developing the enabling technologies that are key to accomplishing a rather rich and diverse span of missions through the use of a coordinated drone swarm for civilian purposes. Goals of the foreseen missions include environmental monitoring, first response to natural disasters, monitoring of social events, safety inspection of public utility grids or other critical infrastructures. The project team includes seven partners, being either research institutions or Small and Medium-sized Enterprises (SME) with permanent operations in Tuscany. More in detail, the project aims at: *(i)* developing sensors to monitor the presence of potential pollutants within surveyed environments; *(ii)* achieving computer vision techniques and algorithms which can detect complex objects and extract information on local anomalies which might affect them; *(iii)* developing suitable logics and algorithms which can effectively organize and guide the overall swarm motion and actions during a mission; *(iv)* studying, developing and demonstrating network architectures and protocols which can allow communication among multiple drones within a swarm while also increasing communication reliability towards the ground segment and reducing the *Size, Weight and Power (SWaP)* requirements of in-flight radio-communication equipment.

In the following, we present an overview of the activities on communication and image processing currently carried out within the SCIADRO framework.

#### 3.1 Inspection of Aerial Power Lines

The inspection of aerial power lines using UAVs is a service offered by several companies, in order to acquire high quality videos both in the visible light spectrum and in the infrared spectrum. The SCIADRO project aims at automatizing the monitoring process by using a single UAV or a swarm, in a cost-effective manner. The complete automation of such a task requires to empower scene understanding capabilities on board of the UAV, sharing processing results with peers. The specific use case of the inspection of aerial power lines is taken into account. The UAV swarm is made of drones equipped with different payloads: infrared and RGB cameras, with acquisition parameters set differently, depending on which task should be carried out. The acquired sequences of images undergo 2D and 3D processing, summarized in Fig. 1. The 3D scene reconstruction uses

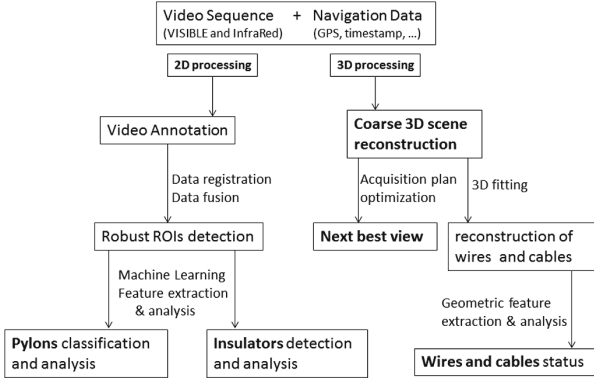


**Fig. 1.** The processing pipeline for 2D and 3D video processing.

large views of the scene, with single frame preferably including at least two subsequent pylons; the coarse 3D scene may be used for a real-time re-planning of the path of the swarm, e.g. in order to reduce data redundancy or to trigger a focused inspection where possible anomalies are detected, e.g. excess vegetation, or missing/loose/broken components. On the other hand, 2D image processing applied to both RGB and infrared video sequences would benefit a lot from the consistent video annotation of the two sequences of data. The features extracted from each sequence are used to define a fusion map of the inspected power line, possibly refining the video annotation, and supporting classification of relevant components (tower structure, hanging point, insulator, cables) and evaluation of their possible defects. In this case, the swarm advantage is to have heterogeneous data of the same target (RGB and IR data), able to make detection and classification tasks more efficient and robust.

**Image Understanding and Recognition.** SCIADRO aims at enabling an UAV to perform very complex tasks such as object detection, recognition, and analysis in an unknown environment; it requires fast and robust algorithms, and there are no standard approaches in the literature. Also, image processing should be specifically designed for the collaborative setting of an UAV swarm. Even if the collaborative setting poses a number of issues (e.g. regarding the information sharing and processing), it could be seen as a strength, if a data fusion step is properly implemented on the different data flows: this kind of processing may efficiently increase in quantity and quality the information extracted by the diverse sensors hosted by the UAVs. In the scenario of inspection of aerial power lines, the following set of actions is necessary: *(i)* detection of wires and cables; *(ii)* analysis of wires and cables; *(iii)* detection and classification of electric towers; *(iv)* analysis of tower components (insulators, hanging points). In more details, the detection of wires and cables is inspired by Candamo et al. [8], whose method builds a feature map on the basis of a pixel motion estimation, the morphological properties and the linear patterns, computed via a multi-window

Hough space. In our setting, the detection will also benefit of the thermal imaging and 3D fitting, in order to increase the robustness against scene complexity, occlusion, noise, and environmental clutter. Once wires and cables are correctly detected, the thermal data and the high resolution images are used to assess their health status. Few related works can be found about detection and classification of electric towers, apart from some preliminary results in [9]. The most recent approaches, such as [10], consider this task as a supervised learning problem. In particular, we will use a multi-layer perceptron neural network both to predict whether the region inside an image is a tower (or not), and to distinguish the tower type on the basis of a dataset of training. A rich dataset of images is needed to train the neural networks. The correct classification of the tower would improve the performance of the automatic detection and analysis of the tower sub-components (i.e., insulators and hanging points), which will use a region-based segmentation and template matching.

**Scene Acquisition and 3D Reconstruction.** As anticipated in Sect. 3.1, the physical status of the surface of wires and insulators can be evaluated by relying on Computer Vision techniques. However, there are parameters that require accurate geometric measurements, such as checking for proper hanging of the wire by modeling it as a mathematical function (i.e., the *catenary curve*), and ensuring that the space surrounding the wire is clear of obstructions. SCIADRO will use Computer Graphics techniques, to accurately acquire a representation of the 3D scene, which can be analyzed to detect anomalies. In fact, a 3D representation of the aerial power lines and of the surrounding environment are generated, and analyzed by *photogrammetry* algorithms, or through active acquisition devices (e.g., UAV-mountable 3D scanners, namely LiDAR devices). The target area is *sampled* by several UAVs, and each sample produces a 3D georeferenced point, by collectively creating a so called *point cloud*. By analyzing the point density in the cloud and combining it with the path of UAVs, the next navpoints can be estimated, allowing for the reconstruction of so-far unknown areas of the scene. The integration of such an algorithm, known as *next best view* selection, will produce, as time passes, a better and better reconstruction of the scene. Once enough data has been collected, a combination of Computer Vision and Computer Graphics techniques will be used to detect the aerial power lines. At first, points are classified based on their confidence in belonging to an elongate structure (i.e., a wire) by analyzing the anisotropy of the spatial distribution of the neighboring points with the eigenvalues of the covariance matrix of the 3D coordinates. An experimental plug-in has been developed in MeshLab [11] to harness the algorithmic correctness (see Fig. 2). By observing that a catenary seen from above is a straight line, a Hough Transform [12] is applied to the projection of candidate points onto the ground plane; each detected segment is then projected in its containing vertical plane and a RANSAC fitting procedure is applied to compute the parameters of the catenary equation that will be used to test whether the cable is hanging properly. But, even if the wire catenary itself complies to construction constraints, obstructions such as tree branches

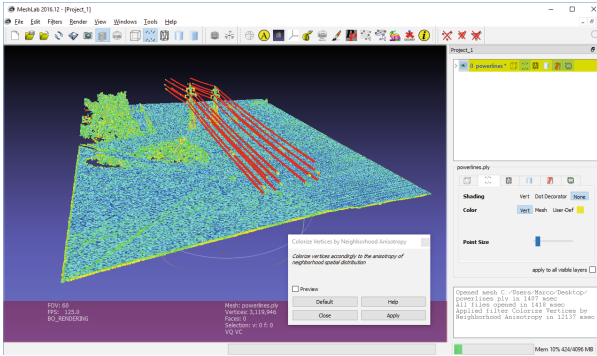


**Fig. 2.** Powerline 3D points classification in the MeshLab plug-in.

should trigger a maintenance action. To cope with these scenarios, 3D analysis will exploit technologies such as voxel coloring [13] to check whether power lines have a surrounding adequately clear of obstructions. Even if an automatic analysis is possible, it is often very useful to make the surveyor or the operator aware of the swarm configuration and the actual condition of the scene of interest. Hence, the need for a visualization tool that is able to cope with multiple video stream and present them to the user in an effective way. The problem of assembling and presenting multiple views of the same scene has been tackled for still images in [14] and for video streams in [15, 16], with the goal of generate smooth transitions from one point of view to the other. Building on these ideas, in the context of SCIADRO, we are currently developing a visualization tool that helps the user understand the current spatial configuration of the swarm and assist her in inspecting the scene with a constrained navigation metaphor.

### 3.2 Sensing the Crowd with UAV Swarms

Even if the current regulation limits using UAVs in urban and populated areas, such limitations may be mitigated in the near future, thus opening to some possible application scenarios where UAV swarms could be employed. According to the latter, in SCIADRO it is investigated how swarms can be employed to achieve crowdsensing tasks. The term *crowdsensing* is referred to the possibility of collecting data produced by people devices in urban (or rural) areas. In fact, the great majority of today's smart devices provide advanced sensing and computational capabilities that can be exploited to collect data generated directly from the crowd. The ParticipAct living lab [17] must be cited among the successful crowdsensing campaigns, which was designed to gather environmental and multimedia data generated by smartphones or smartwatches (i.e., temperature, noise intensity, user surveys, pictures or movie clips). We plan to employ an UAV swarm as mobile agents that collect specific kinds of data from people's devices, by flying over the region of interest. Such devices already have the possibility of a direct interaction, giving rise to the so-called Mobile Social Networks (MSN) [18].

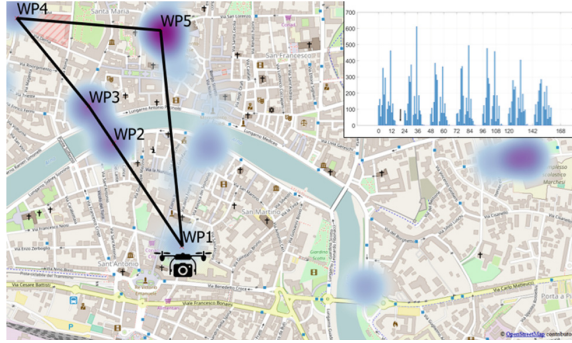

**Fig. 3.** The crowdsensing scenario under consideration.

UAVs could be analogously seen as peers of a MSN. In fact, they can be equipped with short range communication interfaces in order to join the MSN formed on the ground, similarly to other devices. In this context, UAVs act as mobile collectors of data. The design of optimized trajectories is a key element that allows the swarm to efficiently overfly the most crowded locations. Therefore, understanding the way the people move and the way the people interact is crucial for an efficient use of UAVs in crowdsensing scenarios.


Figure 3 shows the map of Pisa with an overlay heatmap of the most crowded areas. The UAV overflies a number of way-points (WP1 to WP5), since we learned from history of users' mobility that those areas become crowded at specific times. In order to measure the effectiveness of the proposed trajectory, a methodology is necessary to measure the amount of data that an UAV can collect. To this purpose, we propose some metrics useful to determine: (i) the quality of the interactions among the users; (ii) the fraction of the users *sensed* by the UAV. In particular, we are interested in measuring the number of interactions of the UAV swarm with other devices (also referred to as *contact number*), and the duration of such interactions, also referred to as *contact duration*. The inset in the right side of Fig. 3 shows the average number of hourly contacts of the UAV with other ground devices on a hourly basis. We can compare such values to those obtained with UAV trajectories built without any notions of the human sociality. We refer to the last ones as *social-oblivious* paths. Preliminary results show a remarkable increase on the number of UAV swarm contacts through social-aware trajectories, by reducing the flight time.

### 3.3 MP-RTP-Based Multimedia Data Transmission from UAVs to Ground

In this project, also the use of multipath techniques is of interest, in order to deliver quasi real-time multimedia data from one or more UAVs toward a terrestrial Ground Control Station (GCS). The data link is assumed separated from the C2 link for safety reasons.

We focus on the more challenging case of a live video rather than still frames, which require less bandwidth. An UAV can experience bad channel conditions towards a GCS due to obstacles or channel fading; furthermore some Doppler effect must be taken into account, in case of high speeds. Moreover, bandwidth requirements must be tackled since multimedia flows are bandwidth-eager, but broadband links can be very expensive. We propose the use of MPRTP (Multi-Path Real-time Transport Protocol) to support High Throughput (HT) multimedia applications.

Multiple physical links are aggregated by MPRTP, in order to provide an efficient, reliable and cost-effective HT logical channel. Having more than one channel available at any time, the better performing channel (or channels subset) can be used, excluding (or limiting the use of) bad performing ones. The use of MPRTP provides a way to *schedule* the transmission of a multimedia flow over multiple links, according to the implemented scheduling policy. Figure 4 sketches the use of MPRTP between an UAV and its GCS in the proposed scenario. A preliminary implementation of MPRTP protocol is already available, built upon the open source multimedia framework GStreamer. The scheduler is the core module, highlighted in Fig. 4 as part of the MPRTP implementation. The scheduler core functionalities can be summarized as: (*sender side*) splitting of the multimedia flow in  $n$  sub-flows, and transmission of the  $i$ -th subflow on the  $i$ -th physical link; (*receiver side*) aggregation of the  $n$  subflows to reconstruct the original multimedia flow, and transmission of feedback data (RTCP).

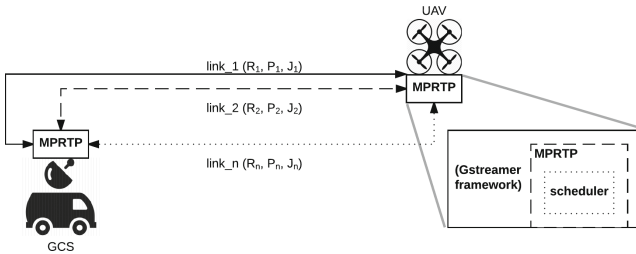

**Fig. 4.** An exemplary scenario involving the use of MPRTP for multimedia transmissions from an UAV to a GCS.

The current scheduler implementation estimates the overall available bandwidth, and splits the multimedia flow, accordingly. The source video bitrate is then set, by providing the maximum achievable video quality, according to the available bandwidth. However, the current implementation does not provide a way to reduce the load on lossy and/or high-delay sub-links, thus causing corrupted video at the receiver.

We are currently implementing a modified version of the scheduler, which reacts in real-time to time-varying channel statistics, and that is able to properly choose subset of the physical links. Figure 4 shows how our scheduler reacts to Round-Trip Time (RTT)  $R_i$ , packet loss rate  $P_i$ , and jitter  $J_i$  variations on the



$i$ -th link. A preliminary demonstration of what our implementation provides is available at [wnlab.isti.cnr.it/ncomprtp](http://wnlab.isti.cnr.it/ncomprtp).

## 4 Conclusions

In this work, we presented an overview of the activities currently ongoing in the SCIADRO project. The use of UAVs and UAV swarms is under investigation, and several applications have been taken into account, as exemplary use cases of interest. While the use of single drones is quite established, the use of swarms still requires some investigations, and the SCIADRO project will shed some light on still open issues and possible solutions.

**Acknowledgment.** This work has been partially supported by the Tuscany region in the framework of SCIADRO project (FAR-FAS 2014).

## References

1. Daponte, P., De Vito, L., Mazzilli, G., Picariello, F., Rapuano, S., Riccio, M.: Metrology for drone and drone for metrology: measurement systems on small civilian drones. In: *IEEE Metrology for Aerospace*, pp. 306–311. IEEE (2015)
2. Bacco, M., Caviglione, L., Gotta, A.: Satellites, UAVs, vehicles and sensors for an integrated delay tolerant ad hoc network. In: Bisio, I. (ed.) *PSATS 2016*. LNICST, vol. 148, pp. 114–122. Springer, Cham (2016). [https://doi.org/10.1007/978-3-319-47081-8\\_11](https://doi.org/10.1007/978-3-319-47081-8_11)
3. Bacco, M., Ferro, E., Gotta, A.: UAVs in WSNs for agricultural applications: an analysis of the two-ray radio propagation model. In: *IEEE SENSORS*, pp. 130–133. IEEE (2014)
4. Bekmezci, I., Sahingoz, O.K., Temel, Ş.: Flying ad-hoc networks (FANETs): a survey. *Ad Hoc Netw.* **11**(3), 1254–1270 (2013)
5. Matese, A., Toscano, P., Di Gennaro, S.F., Genesio, L., Vaccari, F.P., Primicerio, J., Belli, C., Zaldei, A., Bianconi, R., Gioli, B.: Intercomparison of UAV, aircraft and satellite remote sensing platforms for precision viticulture. *Remote Sens.* **7**(3), 2971–2990 (2015)
6. Adams, S.M., Friedland, C.J.: A survey of unmanned aerial vehicle (UAV) usage for imagery collection in disaster research and management. In: *9th International Workshop on Remote Sensing for Disaster Response*, p. 8 (2011)
7. Menouar, H., Guvenc, I., Akkaya, K., Uluagac, A.S., Kadri, A., Tuncer, A.: UAV-enabled intelligent transportation systems for the smart city: applications and challenges. *IEEE Commun. Mag.* **55**(3), 22–28 (2017)
8. Candamo, J., Kasturi, R., Goldgof, D., Sarkar, S.: Detection of thin lines using low-quality video from low-altitude aircraft in urban settings. *IEEE Trans. Aerosp. Electron. Syst.* **45**(3), 937–949 (2009)
9. Tilawat, J., Theera-Umporn, N., Auephanwiriyakul, S.: Automatic detection of electricity pylons in aerial video sequences. In: *International Conference on Electronics and Information Engineering*, vol. 1, pp. 342–346, August 2010
10. Sampedro, C., Martinez, C., Chauhan, A., Campoy, P.: A supervised approach to electric tower detection and classification for power line inspection. In: *International Joint Conference on Neural Networks*, pp. 1970–1977, July 2014

11. Cignoni, P., Callieri, M., Corsini, M., Dellepiane, M., Ganovelli, F., Ranzuglia, G.: MeshLab: an open-source mesh processing tool. In: Eurographics Italian Chapter Conference. The Eurographics Association (2008)
12. Duda, R.O., Hart, P.E.: Use of the Hough transformation to detect lines and curves in pictures. *Commun. ACM* **15**(1), 11–15 (1972)
13. Seitz, S.M., Dyer, C.R.: Photorealistic scene reconstruction by voxel coloring. *Int. J. Comput. Vis.* **35**(2), 151–173 (1999)
14. Brivio, P., Benedetti, L., Tarini, M., Ponchio, F., Cignoni, P., Scopigno, R.: Photocloud: interactive remote exploration of large 2D–3D datasets. *IEEE Comput. Graph. Appl.* **33**(2), 86–96 (2013)
15. Waschbüsch, M., Würmlin, S., Gross, M.: 3D video billboard clouds. *Comput. Graph. Forum* **26**(3), 561–569 (2007)
16. Lipski, C., Klose, F., Magnor, M.: Correspondence and depth-image based rendering: a hybrid approach for free-viewpoint video. *IEEE Trans. Circuits Syst. Video Technol.* **24**(6), 942–951 (2014)
17. Cardone, G., Cirri, A., Corradi, A., Foschini, L.: The participact mobile crowd sensing living lab: the testbed for smart cities. *IEEE Commun. Mag.* **52**(10), 78–85 (2014)
18. Girolami, M., Chessa, S., Caruso, A.: On service discovery in mobile social networks: survey and perspectives. *Comput. Netw.* **88**, 51–71 (2015)