

Message Admission Control along with Buffer Space Advertisement to Control Congestion in Delay Tolerant Networks (DTNs)

Faiza Farooq, Nargis Bibi

Department of Computer Science Fatima Jinnah Women University Rawalpindi, Pakistan
faizafarooq699@gmail.com, nargis@fjwu.edu.pk

Abstract

Delay and Disruption Tolerant networks (DTN) are subject to intermittent connection and long delay, thus the internet congestion control mechanisms are not suitable for DTNs. Data Delivery Rate and Delivery Delay are the parameters affected badly when network or part of a network is in congestion. In recent years, Congestion control strategies in DTNs are considered an active area for research. In this research a hybrid congestion control mechanism, Message Admission Control with Buffer Space Advertisement (MACBSA) is proposed which is based on MaxProp routing protocol. Preliminary results show the improvement in network performance while utilizing network resources efficiently.

Keywords: DTN, Opportunistic Contacts, Intermittent Connectivity, Congestion Control, ONE.

Received on 23 November 2017, accepted on 12 March 2018, published on 09 April 2018

Copyright © 2018 Faiza Farooq and Nargis Bibi, licensed to EAI. This is an open access article distributed under the terms of the Creative Commons Attribution licence (<http://creativecommons.org/licenses/by/3.0/>), which permits unlimited use, distribution and reproduction in any medium so long as the original work is properly cited.

doi: 10.4108/_____

1. Introduction

In TCP/IP networks, continuous end-to-end connection is guaranteed. The routing protocols work on the assumption that complete route can be established from source to destination. Delay and Disruption Tolerant network (DTNs) are the networks that lack continuous network connectivity thus guarantee no end to end connection [1]. Routing between the non-fixed locations of nodes is a challenging task. Routers are used to forward the packet in TCP/IP. In extreme scenarios, if the link between routers is not available, TCP/IP simply discards the packet which reduces reliability. DTN is a solution to this scenario, which has been proposed by National Aeronautics and Space Administration (NASA) in which hop to hop reliability is maintained by using custody transfer [2]. For DTNs, there is a store-carry and forward approach, thus more disruption tolerant than TCP/IP [3]. Routers store the incoming packet in their memory chip or

buffer by implementing bundle layer, in order to find the next hop and lookup their routing table to decide the route. Passive routing and Active Routing are the two main divisions

of Stochastic Routing scheme that are preferable as topology can be changed any span of time [2, 4]. In DTNs, one copy of message is not sufficient to obtain acceptable delivery ratio, thus replication of message such as flooding mechanism is used. By increasing no. of replication, delivery rate can be increased, while considering infinite number of network resources. In reality network resources are limited which leads to the stage of head of line blocking considered as congestion. Like TCP/IP, performance of the DTN's depend on many factors such as latency, probability of packet delivery, congestion control, flow control, overhead ratio, hop count, goodput and buffer space utilization. As it is significant to ensure the delivery of packet on time, but congestion occurrence affects the performance of DTNs badly. Congestion control mechanism is required to improve the performance measure of DTNs in terms of Latency, Delivery Ratio, and the delivery cost known as

overhead [5]. In this work the challenging issues of DTNs are studied, and existing congestion control mechanisms are investigated such as open-loop, close-loop and hybrid. The Research hypothesis is to investigate the existing congestion control techniques for simulating a hybrid scheme to control receipt and forwarding of packet for reducing Latency, increasing Delivery Ratio and minimizing the Overhead Ratio. The key contribution of this research is to reduce congestion in DTNs by using the proposed hybrid model. In addition to improve Delivery Ratio, while, decreasing Latency, and to utilize network resources efficiently in order to reduce overhead ratio. The remaining work is organized as: Section 2 begins with state of the art congestion control techniques. In Section 3, methodology is presented. Simulation parameters and performance evaluation is discussed in Section 4. Section 5 contains the results of simulation. Finally, the paper is concluded in Section 6

2 Related Work:

It is important to consider the routing protocols in congestion control scheme, as some congestion control techniques such as the technique presented in [6-22] depend on the routing protocols and underlying environment, while some mechanisms like [23-31], [5] are independent of the routing protocol that is being used. Successful transmission of data in intermittently connected networks is a challenging task. The routing protocol used for these networks should be more intelligent than the protocol used in TCP/IP network. Some routing protocols like Direct Delivery, FC, Seek and Focus, VADD, FFRDV and GeOpps use forwarding technique. Other protocols like Epidemic, Spray and Wait, PROPHET, MaxProp and RAPID use the replication mechanism. While few of the existing protocols work on the combination of forwarding and replication mechanism such as GeoSpray, VDTN-ToD, TrendOfSpray, PROPHET(+/or) ToD [3]. In Table 1, Table 2 and Table 3 a summary of current congestion control efforts is presented.

Table 1. Summary of closed-loop congestion control mechanism

S#	Mechanism	Routing Protocol	Congestion Detection	P/R/H Control	Contacts
1	Hop by Hop local flow control [23]	Independent	Network Capacity	Hybrid	Scheduled
2	Custody Transfer by Pushing-Pulling Strategy [26]	Independent	Buffer Availability	Reactive	Predicted
3	Storage Routing [6]	Dependent	Buffer Availability	Reactive	Scheduled & Predicted
4	Advertising Buffer [28]	Independent	Buffer Availability	Proactive	Opportunistic
5	Path Avoidance [7]	Dependent	Buffer Availability	Hybrid	Predicted
6	TBCC [25]	Independent	Network Capacity	Proactive	Predicted
7	RBCC [24]	Independent	Buffer Availability	Hybrid	Predicted
8	CRSG [27]	Independent	Buffer Availability	Reactive	Opportunistic
9	CAFA (Congestion Aware) [12]	Dependent	Buffer Availability	Proactive	Predicted
10	CBCC [30]	Independent	Buffer Availability	Hybrid	Opportunistic
11	LTP-T [15]	Dependent	Buffer Availability	Reactive	Scheduled
12	IMRASFC [10]	Dependent	Buffer Availability	Hybrid	Opportunistic
13	CCC [13]	Dependent	Buffer Availability	Hybrid	Scheduled
14	RRCC [11]	Dependent	Drop Rate	Hybrid	Predicted & Opportunistic
15	CAFE(Context Aware) [8, 9]	Dependent	Buffer Availability	Hybrid	Predicted
16	MACRE [20]	Dependent	Buffer Availability	Hybrid	Opportunistic
17	CCT [14]	Dependent	Drop Rate	Reactive	Predicted
18	ION [31]	Independent	Network Capacity	Proactive	Scheduled

Table 2. Summary of open-loop congestion control mechanism

S#	Mechanism	Routing Protocol	Congestion Detection	P/R/H control	Contacts

1	Following Routing [18]	Dependent	Buffer Availability	Reactive	Opportunistic
2	CASPaR[21]	Dependent	Network & Buffer	Proactive	Opportunistic
3	AFNER [16]	Dependent	Network Capacity	Hybrid	Opportunistic
4	DPRM [29]	Independent	Buffer Availability	Proactive	Opportunistic
5	SARM [17]	Dependent	Buffer Availability	Reactive	Predicted & Opportunistic

Table 3. Summary of Hybrid congestion control mechanism

S#	Mechanism	Routing Protocol	Congestion Detection	P/R/H control	Contacts
1	Smart-DTN-CC[5]	Independent	Buffer Availability	Hybrid	Adaptive
2	DCCR [19]	Dependent	Buffer Availability	Hybrid	Opportunistic

3.Admission Control along with buffer Space Advertisement (MACBSA):

Mostly, in proactive techniques, admission control policies are used to avoid congestion before the transmission (forwarding and receipt of packet) starts. Admission rate is define as the adjustment of the input and output rate of a node. Admission control depends on the risk estimation value of the transmission. Buffer space of node, message’s Time to Live (TTL), bandwidth

5 Result discussion and analysis:

The first experiment is conducted using heterogeneous message size with 2MB buffer size. Simulation is carried out for different TTL values between 10min to 60min. The observation is that by increasing message TTL the overhead ratio can be reduced for both plain MaxProp and MaxProp with congestion control mechanism. Figure 1 shows the performance of routing protocol in terms of overhead ratio along with congestion control mechanism in the shortest path map based movement model. Moreover, the plot shows that the proposed congestion control mechanism is very efficient for reducing overhead ratio. Figure 2 indicates the delay plot in which marginal gain in latency is observed. Figure 3 illustrates the performance evaluation in terms of delivery probability. Delivery probability is higher in case of MaxProp with congestion control mechanism. The second experiment is conducted using heterogeneous message size with buffer size between 2 to 8 MB. It is noted that the network parameters such as delivery probability, packet latency and overhead ratio are highly dependent on the buffer size hence experiments are conducted to present results as a function of buffer size. Figure 4 shows the delivery probability in terms of varying buffer size. This experiment is conducted by using 126 mobile nodes and message generation interval is random between [25, 35]. Same behavior is observed as previously conducted experiments. Increasing buffer size results in high delivery probability (i.e. approximately 1) but from 5.5 MB to onwards, no further improvement in delivery probability is observed. Figure 5 shows the effect of congestion control mechanism on overhead ratio. A comparison of the overhead ratio between congestion control mechanism and baseline scenario may be made. It shows significant reduction in the overhead ratio for both scenarios with an increase in the buffer size. Whereas, with smaller buffer size, the proposed technique makes a significant difference and reduces overhead ratio. Figure 6 shows the results obtained by calculating average latency against varying buffer sizes. At small values of buffer size, the latency is high for the proposed technique. Table 5 shows the normalized value of evaluation parameters with Shortest Path Map Based Movement Model in high traffic intensity, among varying message sizes. Simulation results show that, by using anticipated congestion control mechanism, significant amount of delivery ratio can be achieved along with the reduction of the overhead ratio; on the other hand latency is increased. The baseline scenario uses shortest path to find relay node, but the proposed technique adds the buffer occupancy constraint to find a relay node that may find a node to relay a packet on comparatively longer distance, which increases delivery probability however it also increases latency

Table 5. Normalized Parameters

Routing scheme	MaxProp Router	MaxProp with CC
Normalized Delivery Ratio	0.712133	0.764883
Normalized Overhead Ratio	172.2125	158.6795
Normalized Latency	465.4171	482.0173

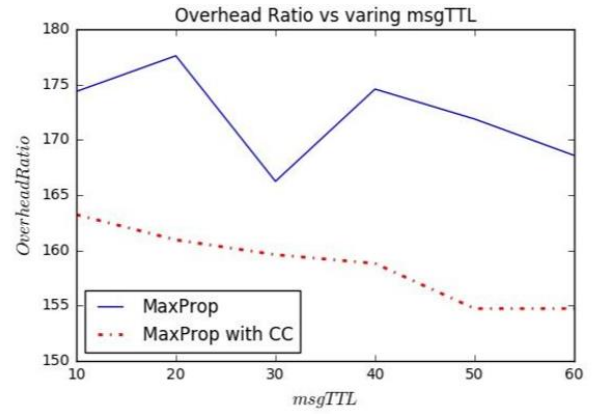


Fig. 1. Overhead ratio Vs varying Message TTL (Opportunistic network scenario, bandwidth of 250Kbps, message generation interval of 25-35, 126 No. of nodes)

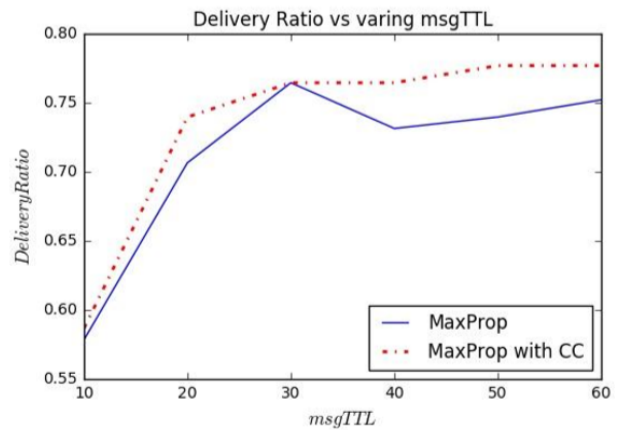


Fig. 2. Delivery ratio Vs varying Message TTL (Opportunistic network scenario, bandwidth of 250Kbps, message generation interval of 25-35, 126 No. of nodes)

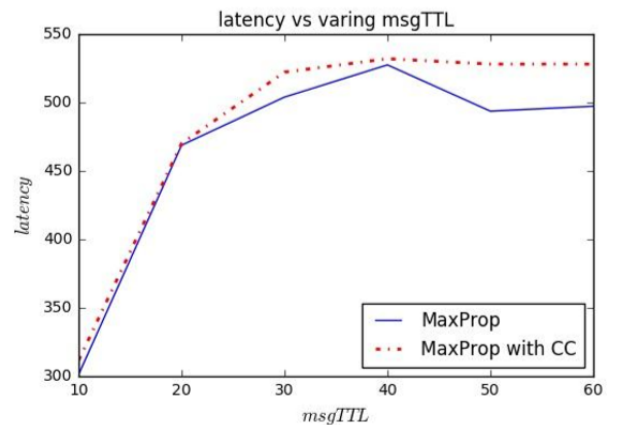


Fig. 3. Average Latency Vs varying Message TTL (Opportunistic network scenario, bandwidth of 250Kbps, message generation interval of 25-35, 126 No. of nodes)

- (NSWCTC), 2010 Second International Conference on. 2010. IEEE.
11. Thompson, N., et al. *Retiring Replicants: Congestion Control for Intermittently-Connected Networks*. in *INFOCOM*. 2010. Citeseer.
 12. Radenkovic, M. and A. Grundy. *Congestion aware forwarding in delay tolerant and social opportunistic networks*. in *Wireless On-Demand Network*