

Paradoxes in a Multi-criteria Routing Game

Amina Boukoftane¹, Eitan Altman^{2,3(✉)}, Majed Haddad⁴, and Nadia Oukid¹

¹ University of Blida 1, Route de Soumaa, B.P. 270, Blida, Algeria

² Universit Cote d'Azur (UCA), INRIA, 06902 Sophia-Antipolis, France
eitan.altman@inria.fr

³ LINC3, 23 avenue d'Italie, 75013 Paris, France

⁴ LIA/CERI, University of Avignon, Agroparc, BP 1228, 84911 Avignon, France

Abstract. In this paper, we consider a routing game in a network that contains lossy links. We consider a multi-objective problem where the players have each a weighted sum of a delay cost and a cost for losses. We compute the equilibrium and optimal solution (which are unique). We discover here in addition to the classical Kameda type paradox another paradoxical behavior in which higher loss rates have a positive impact on delay and therefore higher quality links may cause a worse performance even in the case of a single player.

Keywords: Routing game · Multi-objective problem · Lossy links · Nash equilibrium · Price of anarchy · Paradox

1 Introduction

There has been much work on routing games with additive costs (cost associated with a route is additive over the links of the route) [6,7]. This has been extended to multi-objective additive criteria, see e.g., [4,6,8]. Little is known however on routing games with non additive costs. There has been some work on routing games for some given simple topologies with non-additive costs [6] triggered by networking applications (e.g., [3,5]).

In this work, we consider costs related to weighted sum of two different types of performances: the delay which is additive, and losses which are not. We focus on a simple network model that has been studied in the case of a single objective by [2,3]. We first derive explicit expression of the equilibrium and then study numerically its properties.

In case of a single objective, it has been shown that a Braess type paradox exists for the topology that we consider [2,3]. We identify a new type of paradox which has some surprising behavior. We then compute the price of anarchy (defined as in [1]).

The rest of the paper is organized as follows: In Sect. 2, we describe the system model and the performance measures adopted throughout the paper. In Sect. 3, we compute the global optimum. The Nash equilibrium is computed in Sect. 4. Simulation results along with the discussion are presented in Sect. 6. Section 8 concludes the paper.

2 The Model and Performance Measures

We shall use the load balancing network topology introduced in [2] consisting of three nodes: two source nodes S_r and S_l (r stands for right and l for left) and one common destination node D (see Fig. 1). There are $2N$ sources of flows, $S(i)$, $i = 1, \dots, 2N$. Each flow consists of an independent Poisson distributed point process with a rate ϕ . Packets from source $i = 1, \dots, N$ arrive at node S_l (left), whereas packets from source $i = N + 1, \dots, 2N$ arrive at node S_r (right). Source $i = 1, \dots, N$ can split its flow between its direct path S_lD and the indirect one S_lS_rD . Source $i = N + 1, \dots, 2N$ can split its flow between its direct path S_rD and the indirect one S_rS_lD .

More precisely, whenever a packet arrives from source i , the source flips a coin that has a probability p_i to have an outcome called “direct” and a probability of $1 - p_i$ to have an outcome called “indirect”. If the outcome is “direct” then the packet is routed over the direct route, and otherwise it is routed over the indirect one. The process of packets originating from source i that take the direct path is thus Poisson with rate ϕp_i . The process of packets that arrive at node i and that take the indirect path is Poisson with rate $\phi(1 - p_i)$. Let x_l^i be the rate of flow sent by source i through link l . Links S_rS_l and S_lS_r are assumed to be wireless so that packets sent over S_rS_l and S_lS_r suffer independent losses with some fix probability q . The delay over these links is assumed to be a constant denoted by δ . Links S_lD and S_rD are assumed to be lossless but they incur a congestion cost per flow unit that uses them of $T_l(x) = 1/(C - x_l)$. Here, C is the link capacity and x_l is the total flow going through link l . Therefore for each player i , consider the arrival process of packets that arrive at node S_k and that are rerouted to the indirect path S_kS_mD (where $k = l, r, m \neq k$). It is a Poisson process as well and its rate is $\phi p(1 - p_i)(1 - q)$.

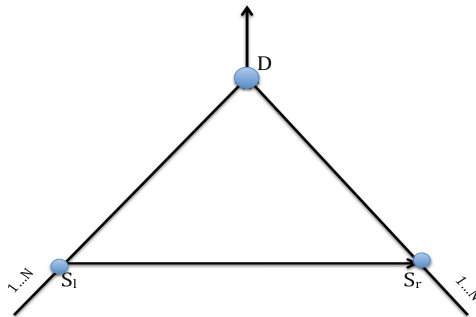


Fig. 1. The competitive routing model.

Let $i \leq N$. The cost for source i is a weighted sum of the average delay of its flow and its loss rate:

$$\begin{aligned}
 J_i(p) &= \frac{\phi p_i}{C - \phi \sum_{j=1}^N p_j - \phi q \sum_{i=N+1}^{2N} (1 - p_j)} \\
 &+ \frac{\phi(1 - q)(1 - p_i)}{C - \phi \sum_{j=N+1}^{2N} p_j - \phi q \sum_{i=1}^N (1 - p_j)} \\
 &+ \phi \delta(1 - q)(1 - p_i) + \gamma \phi q(1 - p_i).
 \end{aligned} \tag{1}$$

The three first terms correspond to the delay cost and the last term corresponds to the cost of losses. The first term corresponds to the congestion cost in the direct path of i and the two following terms correspond to the congestion cost along the indirect path. The optimal symmetric solution is obtained by minimizing $\sum_i J_i(p)$ over p_i and adding the constraint that p_i are the same for all i (we then omit i from the notation p_i).

Let

$$X_l(x) = \phi \sum_{j=1}^N p_j + \phi q \sum_{j=N+1}^{2N} (1 - p_j)$$

be the rate of packets that use link $S_l D$. We assume that the link cost per unit of flow are linear in the flow through them. This amounts to use the first term in the Taylor's expansion of (1). $J_i(p)$ is thus approximated by

$$J_i(p) = \phi p_i(ax_l + b) + \phi(1 - q)(1 - p_i)(ax_l + b) + \delta \phi(1 - p_i) + \gamma \phi q(1 - p_i)$$

where a and b are some positive constants.

3 Global Optimum Calculation

The global optimal solution is obtained by solving

$$\frac{\partial}{\partial p} \sum_{i=1}^{2N} J_i(p) = 0$$

(unless it is on the boundary). We obtain the unique solution:

$$p = \frac{1}{2} \frac{a\phi N(2q^2 - 2q + 1) + bq - \gamma q - \delta}{\phi a q N(q - 1)}.$$

We find it convenient in the numerical investigation to write $z = \gamma q + \delta$ since the dependence of the global optimum or the equilibrium on each one of the two parameters δ and γ (for fixed q) appears only through the value of z . Thus, p can be written:

$$p = \frac{1}{2} \frac{a\phi N(2q^2 - 2q + 1) + bq - z}{\phi a q N(q - 1)}.$$

Note that

$$J'(p) = 2a\phi^2q^2N(1 - p) + \phi bq + \phi^2aN + 2a\phi^2qN(p - 1) - \phi z.$$

$J'(p) = 0$ for

$$z = -2a\phi qN((1 - p)(1 - q)) + bq + a\phi N$$

$J'(p)$ is positive if $z < \phi aN(2q(q - 1)(1 - p) + 1) + qb$. In this case J is an increasing function, and the minimum is reached on 0.

On the other hand, if $z > \phi aN(2q(q - 1)(1 - p) + 1) + qb$, J is a decreasing function, and the minimum is reached on 1.

Note that

- $p < 1$ if $z < a\phi N + qb$
- $p > 0$ if $z > a\phi N(2q^2 - 2q + 1) + qb$.

4 Equilibrium Calculation

The equilibrium is obtained by setting $p_i = p$ to be the same for all i except for $i = 1$ where it is taken to be equal to \hat{p} . We then find for each value p the best response $\hat{p} = f(p)$ for player 1. A fixed point of this equation provides the equilibrium. We did the same as below and get the Nash equilibrium which is equal to:

$$p_1 = \frac{1 - a\phi qN(p + q - pq) + q(\phi ap + \phi a - b + \gamma) - \phi a + \delta}{2\phi aq}.$$

Let \hat{p} be the point obtained by replacing p_1 by p , we obtain:

$$\hat{p} = \frac{a\phi Nq^2 + a\phi(1 - q) + qb - \gamma q - \delta}{a\phi q(qN - N - 1)}.$$

$$\hat{p} = \frac{a\phi Nq^2 + a\phi(1 - q) + qb - z}{a\phi q(qN - N - 1)}.$$

We have $qN < N < N + 1$, so the denominator is negative.

By differentiating the cost function with respect to \hat{p} and setting the derivative equal to zero, we get for equilibrium these conditions:

- J is an increasing function if: $z > 2a\phi qN - a\phi N + bq$,
- J is a decreasing function if: $z < 2a\phi qN - a\phi N + bq$.

Also note that

- $\hat{p} < 1$ if $z < a\phi(qN + 1) + bq$
- $\hat{p} > 0$ if $z > a\phi q^2N + a\phi(1 - q) + bq$

5 Price of Anarchy and Paradoxes

The price of anarchy is the ratio of the worst case objective function value of a Nash equilibrium and that of an optimal outcome. That measures how the efficiency of a system degrades due to selfish behavior of its agents. The price of anarchy [1] is a method to measure the inefficiency of equilibrium, it has been used to measure the inefficiency in congestion networks. In this case, each user of the network has a source and destination and they must pay a cost to travel from their source to their destination. In this case it is given by:

$$PoA = \frac{2NJ_i(\hat{p})}{2NJ_i(p)}$$

We say that a paradox occurs if when replacing links with higher quality ones result in worse performance. In our case, a higher quality link could mean a link with smaller delay δ or one with a smaller loss probability q . For example, there is a paradox if the derivative $J'(\delta)$ of J at the equilibrium w.r.t. the delay δ is negative, where

$$J'(\delta) = \frac{a\phi + a\phi N^2(1 + q^2) + 2a\phi Nq(1 - N) + 2bq - 2\delta - 2\gamma q}{aq(qN - N - 1)^2}$$

In a similar network with a single objective for each player, a paradoxes been observed [2,3,5] in which, for suitable parameters, improving the quality of the link(s) between S_r and S_l results in worse performance for all players. We may search for a similar paradox in our problem in which the quality of the link stands for its delay (higher quality means lower delay) or loss rate (higher quality means lower loss rate). The condition for this type of paradox is then that J at equilibrium would be decreasing in the network parameter (e.g., in the delay δ). Thus, the derivative of J at equilibrium should be decreasing where the latter is given by

$$J'(\delta) = \frac{a\phi + a\phi N^2(1 + q^2) + 2a\phi Nq(1 - N) + 2bq - 2z}{aq(qN - N - 1)^2}$$

Note that J is a decreasing function if

$$z > \frac{1}{2}\phi a(1 + N^2) - \frac{1}{2}\phi aqN(2N - qN - 2) + bq$$

6 Numerical Results

Let us now validate our theoretical findings through numerical simulations. We consider $a = 1, b = 1, N = 4, \phi = 1, q = 0.5$. Notice that the domain of existence of z in this case is [2.2, 3].

Figure 2 depicts the equilibrium \hat{p} and the optimal solution p as function of z . As expected, we observe that both \hat{p} and p are increasing in z , while

the equilibrium \hat{p} dominates the optimal solution p . Figure 3 depicts the cost function of the optimal solution $J(p)$ and the equilibrium $J(\hat{p})$ as a function of z . We observe that both curves are increasing functions. In Fig. 4, we present respectively the variation of the cost function at the optimal solution and at the equilibrium as a function of the loss probability q . Figure 5 depicts the variation of the cost function at the equilibrium as a function of the link delay δ . The price of anarchy is presented in Fig. 6. As expected, for low values of z , the price of anarchy tends to 1.

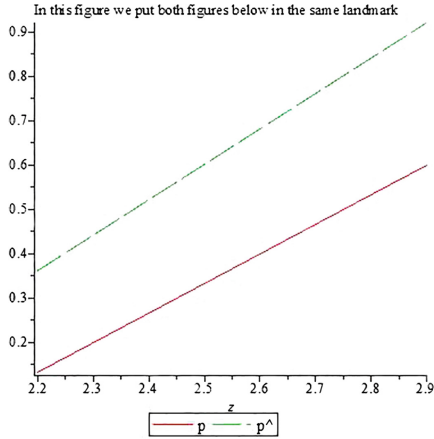


Fig. 2. The optimal solution and the equilibrium as a function of z .

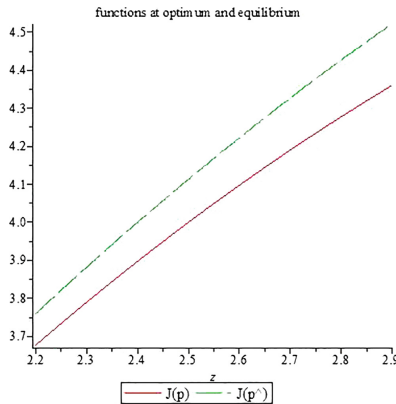


Fig. 3. The cost function at the optimal solution and the equilibrium as a function of z .

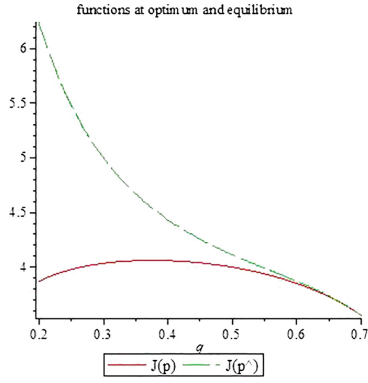


Fig. 4. The cost function J as a function of the loss probability q .

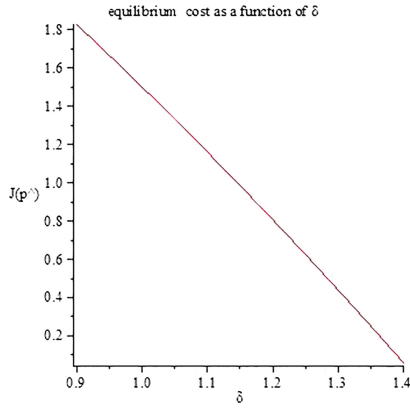


Fig. 5. $J(\hat{p})$ as a function of the link delay δ .

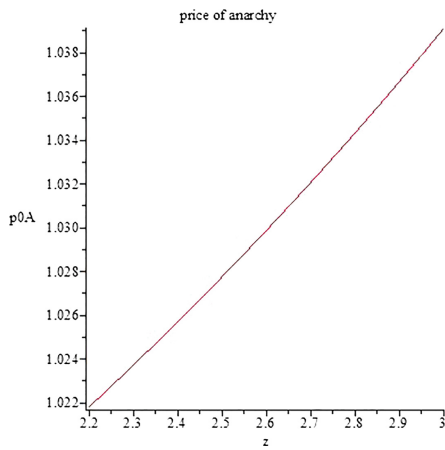


Fig. 6. The price of anarchy.

7 Discussion

New paradox: We identify in Fig. 4 a new type of paradox: the cost is seen not to be monotone in the quality of the link (the loss probability q). This phenomenon is due to the particular multi-objective structure of our problem. Indeed, higher q increases the cost related to losses, but contributes to decreasing the global cost as more losses results in lower congestion and thus in lower delays.

Kameda-paradox: We obtain in Fig. 5 the paradox already observed in [2, 3, 5] in which larger link delay are beneficial for all users. Investing in faster links increases the delay and deteriorates the performance for all players.

8 Conclusion

In this paper, we have studied the routing game with lossy links and congestion. The cost included both a delay component as well as one corresponding to the losses. After computing the unique optimal solution and the symmetric equilibrium, we have showed that even in the case of global optimization there may be a paradox due to the fact that increasing the loss rate may be advantageous when delays are high. In addition the Kameda-paradox has been also shown to occur here.

References

1. Koutsoupias, E., Papadimitriou, C.: Worst-case equilibria. In: Proceedings of STACS (1999)
2. Kameda, H., Altman, E., Kozawa, T., Hosokawa, Y.: Braess-like paradoxes in distributed computer systems. *IEEE Trans. Autom. Control* **45**(9), 1687–1690 (2000)
3. Altman, E., Kuri, J., El-Azouzi, R.: A routing game in networks with lossy links. In: 7th International Conference on NETWORK Games Control and OPTimization (NETGCOOP 2014), October 2014, Trento (2014)
4. Wu, Y., Peng, Y., Peng, L., Xu, L.: Super efficiency of multicriterion network equilibrium model and vector variational inequality. *J. Optim. Theor. Appl.* **153**(2), 485–496 (2012)
5. Altman, E., El-Azouzi, R., Abramov, V.: Non-cooperative routing in loss networks. *Perform. Eval.* **49**(1–4), 43–55 (2002)
6. Altman, E., Boulogne, T., El Azouzi, R., Jimenez, T., Wynter, L.: A survey on networking games in telecommunications. *Comput. Oper. Res.* **33**, 286–311 (2006)
7. Wynter, L., Altman, E.: Equilibrium, games, and pricing in transportation and telecommunications networks. *Netw. Spacial Econ.* **4**(1), 7–21 (2004). Special Issue of on Crossovers between Transportation Planning and Telecommunications
8. El-Azouzi, R., Altman, E.: Constrained traffic equilibrium in routing. *IEEE Trans. Autom. Control* **48**(9), 1656–1660 (2003)