

Discrete Wavelet Analysis: A Mighty Approach for Image Segmentation

Meng Wu¹, Yangyang Hou^{1,*}

¹ School of Physics and Information Engineering, Jiangsu Second Normal University, Nanjing, Jiangsu 210013, P.R. China

Abstract

This paper explores the application of Discrete Wavelet Analysis, a mathematical and signal processing technique, in the context of image segmentation, which provide a pixel-level or region-level decomposition of the image and enable the extraction of relevant information for subsequent analysis and interpretation. Introducing the classic image segmentation techniques and the DWA, this paper discovers that DWA has found wide application in fields such as signal processing, image analysis, and data compression. Compared with Fourier transform, DWA is more suitable for image segmentation, having unique advantages and characteristics. Among the procedures of image segmentation, the most important point is feature selection, which determine the criteria for distinguishing different regions within the image. Despite DWA has many advantages, this technology also owns many challenges and limitations, which may be solved by lasting academic research to refine and extend Discrete Wavelet Analysis methodologies for image segmentation. In short, this research highlights the promise of Discrete Wavelet Analysis emphasizing the use of high- quality image processing.

Keywords: Discrete Wavelet Analysis, Image segmentation, Image processing, Fourier Transform

Received on 30 October 2023, accepted on 07 November 2023, published on 12 December 2023

Copyright © 2023 M. Wu *et al.*, licensed to EAI. This is an open access article distributed under the terms of the [CC BY-NC-SA 4.0](#), which permits copying, redistributing, remixing, transformation, and building upon the material in any medium so long as the original work is properly cited.

doi: 10.4108/eetel.4266

*Corresponding author. Email: hyy1220115@jssu.edu.cn

1. Introduction

Image segmentation [1, 2] is a fundamental computer vision task that involves partitioning a digital image into multiple distinct and semantically meaningful regions or segments [3]. The primary objective of image segmentation is to delineate the boundaries of objects or regions of interest within the image, effectively dividing it into homogeneous and coherent regions that share similar visual characteristics [4], such as color, texture, or intensity.

In an academic context, image segmentation serves as a critical preprocessing step [5] for various higher-level image analysis [6] and computer vision tasks [7], including object recognition [8], scene understanding [9], and image-based measurements [10]. The ultimate goal of image segmentation is to provide a pixel-level or region-level decomposition of the image, enabling the extraction of relevant information for subsequent analysis and interpretation [11].

Numerous algorithms and techniques have been developed for image segmentation, ranging from traditional methods like thresholding, edge detection [12], and region growing [13] to more advanced approaches such as clustering [14],

watershed transformation [15], and deep learning-based methods [16, 17]. The choice of segmentation technique depends on the specific characteristics of the image data and the objectives of the analysis, making image segmentation a versatile and continually evolving field of research and application. Figure 1 is shown below.

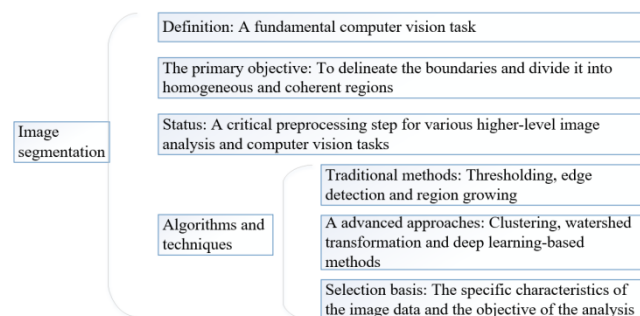


Figure 1. The introduction of image segmentation

2. Discrete Wavelet Analysis

Discrete Wavelet Analysis [18], in an academic context, is a mathematical and signal processing technique [19] used for the decomposition, analysis, and representation of data, particularly in the context of one-dimensional or multi-dimensional signals and images. It is based on wavelet transforms [20], which are a family of mathematical functions that are localized in both time and frequency domains, allowing them to capture both high and low-frequency components in data simultaneously .

The core idea behind discrete wavelet analysis is to represent a signal or image as a combination of wavelet basis functions [21] at various scales and positions. These basis functions, known as wavelets, are used to analyze the data by transforming it into a set of coefficients that represent the signal's behavior at different resolutions [22]. This enables the detection and extraction of features and patterns across various scales, making it particularly well-suited for applications such as image compression [23], denoising, feature detection [24], and data compression [25].

In practical terms, discrete wavelet analysis involves a series of mathematical operations that apply wavelet transforms to the data, resulting in a multi-resolution representation of the signal. This representation is often organized into different "levels" or scales, with each level capturing different frequency components. The resulting wavelet coefficients can be used for various purposes, including feature extraction, noise reduction, and data compression.

Discrete wavelet analysis has found widespread application in fields such as signal processing, image analysis, and data compression. It provides a powerful tool for extracting meaningful information from complex and multi-scale data, making it an essential technique in the analysis and processing of various types of signals and images. Table 1 is shown below.

Table 1 The introduction of Discrete wavelet analysis

Definition	Mathematical and signal processing technique
Purpose	Decomposition, analysis, and representation of data
Basis	Wavelet transforms
The core idea	Represent a signal or image as a combination of wavelet basis functions at various scales and positions
Representative application	Signal processing, image analysis and data compression

3. Relation of Fourier Transform and Wavelet Analysis

The relationship between Fourier Transform [26] and Discrete Wavelet Analysis [27, 28], in an academic context, involves understanding how these two mathematical techniques are interconnected and complementary in the context of signal and image processing. Fourier Transform and Discrete Wavelet Analysis are both essential tools for the analysis of signals and images [29]. They address different aspects of signal processing and offer unique advantages and characteristics [30]:

Frequency vs. Scale Representation: Fourier Transform: The Fourier Transform primarily provides a frequency domain representation of a signal [31]. It decomposes a signal into sinusoidal components of different frequencies, allowing for a detailed analysis of the signal's frequency content. Discrete Wavelet Analysis: Discrete Wavelet Analysis, on the other hand, offers a multi-scale representation of a signal [32]. It decomposes a signal into components at different scales, capturing information at various levels of detail. This makes it suitable for analyzing both high and low-frequency components simultaneously.

Localization: Fourier Transform: The Fourier Transform provides precise frequency information but lacks spatial localization [33]. It represents the entire signal in the frequency domain without indicating where these frequencies occur in the signal [34]. Discrete Wavelet Analysis: Discrete Wavelet Analysis excels at spatial localization [35]. It provides information about which scales and positions in the signal or image contain specific features or details, making it valuable for tasks like feature extraction and image segmentation [36].

Boundary Effects [37]: Fourier Transform: Fourier Transform is sensitive to the entire signal's boundaries and can produce artifacts at discontinuities [38], which may not be ideal for certain applications [39]. Discrete Wavelet Analysis: Discrete Wavelet Analysis can handle boundary effects more effectively due to its localized nature [40]. It is less affected by signal boundaries [41], making it useful for segmenting signals and images [42]. Table 2 is shown below.

Table 2 The comparison of Fourier Transform and Discrete Wavelet Analysis

Types	The comparison of frequency vs. scale representation	The comparison of localization	The comparison of boundary effects
Fourier Transform	Provide a frequency domain representation of a signal	Provide precise frequency information but lacks spatial localization	Be sensitive to the entire signal's boundaries and produce artifacts at discontinuities

Discrete Wavelet Analysis	Offer a multi-scale representation of a signal	Excel at spatial localization	Handle boundary effects
---------------------------	--	-------------------------------	-------------------------

4. Procedures of Image Segmentation

The procedures of image segmentation [43], in an academic context, refer to the systematic steps and methodologies employed for the partitioning of a digital image into distinct and semantically meaningful regions or segments [44]. Image segmentation is a critical task in computer vision and image processing, aimed at identifying and delineating object boundaries or regions of interest within an image. The following is a general description of the procedures involved in image segmentation from an academic perspective:

Preprocessing: Before segmentation, image preprocessing may include activities like noise reduction, contrast enhancement [45], and color normalization [46] to ensure the image is in an optimal state for segmentation.

Feature Selection: Depending on the characteristics of the image data, relevant features, such as color, intensity, texture, or spatial information, are selected to guide the segmentation process. Feature selection is a crucial step in determining the criteria for distinguishing different regions within the image.

Segmentation Method Selection: There are various segmentation algorithms and methods, including thresholding, edge-based techniques [47], region-based methods, clustering, and deep learning-based approaches. The choice of a specific method depends on the characteristics of the image and the segmentation objectives.

Initial Segmentation [48]: The selected segmentation method is applied to the image data to generate an initial partition of the image into regions. This initial segmentation may not be perfect and may require further refinement.

Post-processing [49]: Post-processing steps are often necessary to refine and improve the initial segmentation results [50]. This may include steps like merging small regions, removing noise, filling gaps [51], or smoothing boundaries [52].

Evaluation and Validation [53]: In academic research, it is common to evaluate and validate the segmentation results quantitatively using metrics like precision, recall, F1-score, or Intersection over Union. These metrics assess the accuracy and quality of the segmentation with respect to ground truth data when available.

Iterative Refinement [54]: Depending on the quality of the segmentation results and the specific application, further iterations of preprocessing, segmentation, and post-processing may be performed to achieve the desired segmentation accuracy.

Region Labeling and Analysis [55]: After obtaining the final segmentation, regions or objects are typically labeled and analyzed based on the extracted features. This step may involve further recognition, tracking, or measurement of objects within the image.

Visualization and Output [56]: The segmented image and associated data, including region properties or labels, are often visualized and/or used as input for subsequent image analysis tasks, such as object recognition or scene interpretation [57, 58]. Table 3 is shown below.

Table 3 The purpose of each image segmentation procedure

Procedures	Purpose of each procedure
Preprocessing	To ensure the image is in an optimal state for segmentation.
Feature selection	To determine the criteria for distinguishing different regions.
Segmentation method selection	To segment image quickly and exactly.
Initial segmentation	To segment image into small areas.
Post-processing	To refine and improve the initial segmentation results.
Evaluation and validation	To evaluate whether the quality is up to standard.
Iterative refinement	To achieve the desired segmentation accuracy.
Region labeling and analysis	To further recognize, track, or measure of objects.
Visualization and output	To use practically.

The procedures of image segmentation are fundamental to many computer vision applications, and they play a critical role in extracting meaningful information from complex visual data. The choice of specific procedures and methods depends on the characteristics of the image and the objectives of the segmentation task. Academic research in image segmentation aims to develop and evaluate new techniques for improving the accuracy and efficiency of this essential computer vision process. Figure 2 is shown below.

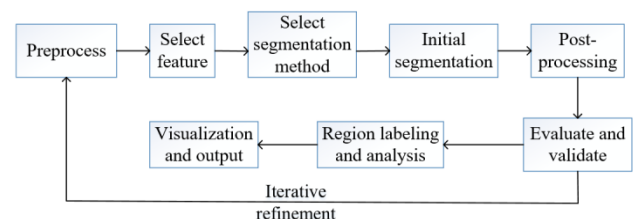


Figure 2. The procedures of image segmentation

5. Discrete Wavelet Analysis for Image Segmentation

Discrete Wavelet Analysis for Image Segmentation, in an academic context, is a methodology that leverages wavelet transforms to partition digital images into coherent and semantically meaningful regions or segments. This approach combines principles from signal processing and mathematical analysis to decompose an image into various scales and spatial frequencies, allowing for the localization and extraction of relevant features and structures.

The academic procedure for employing Discrete Wavelet Analysis for Image Segmentation typically involves the following steps:

Multi-Scale Decomposition [59]: The image is subjected to a multi-scale decomposition using discrete wavelet transforms. This process generates a set of coefficients that represent the image's content at different scales. These coefficients capture both high-frequency details and low-frequency information, facilitating the identification of significant features.

Feature Extraction: The wavelet coefficients [60] are analyzed to extract pertinent information, such as edges, textures, and regions of interest. The choice of features depends on the specific characteristics of the image and the segmentation objectives.

Thresholding or Clustering: Depending on the selected features, thresholding techniques or clustering algorithms are applied to the wavelet coefficients to group similar components and segment the image. Thresholding can be based on wavelet coefficient magnitude, while clustering methods group coefficients with similar properties.

Post-processing: To refine the initial segmentation results, post-processing steps may be employed, which may include merging adjacent regions, eliminating noise, or smoothing segment boundaries.

Evaluation and Validation: The segmented image is evaluated and validated using metrics like precision, recall, F1 score, or IoU, particularly when ground truth data are available to assess the segmentation's accuracy and quality.

Iterative Refinement: Depending on the results and application, further iterations of preprocessing, segmentation, and post-processing may be carried out to enhance the quality of the segmentation.

Region Labeling and Analysis: After obtaining the final segmentation, the regions or objects within the image are typically labeled and analyzed based on the extracted features. This step may involve object recognition, tracking, or quantitative measurements.

Discrete Wavelet Analysis for Image Segmentation offers the advantage of effectively capturing both fine and coarse details in an image, making it suitable for segmenting images with varying textures, contrasts, and scales. Academic research in this field aims to develop and refine wavelet-based methods, explore their applications, and evaluate their performance in various image segmentation tasks, contributing to advancements in image processing and computer vision. Figure 3 is shown below.

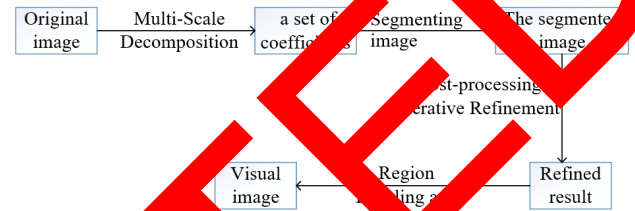


Figure 3 The workflow of DWA

5.1. Computational Burden for DWA

The computational burden of Discrete Wavelet Analysis (DWA), in an academic context, pertains to the significant computational requirements and complexities associated with the application of wavelet transforms to signals and images. This burden arises from the inherent characteristics of DWA and can be described academically as follows:

DWA inherently involves multi-scale analysis [61], as it decomposes signals or images into multiple levels or scales, each capturing different frequency components. The computation of wavelet coefficients at various scales adds to the computational workload.

DWA relies on convolution operations [62, 63], which can be computationally intensive, especially for large datasets. Convolution involves multiplying and summing wavelet coefficients at different positions and scales, contributing to the computational burden.

In the context of image processing, DWA often requires matrix-based operations for the transformation of data. The size and dimensionality of these matrices can significantly impact computation time and memory usage.

DWA can lead to data expansion [64], as it generates wavelet coefficients at multiple scales. This expansion results in larger data volumes that must be processed, stored, and transmitted, thereby increasing the computational burden. Table 4 is shown below.

Table 4 The burden from DWA

The inherent characteristics of DWA	The reasons of complexity
Multi-scale analysis	Wavelet coefficients at various scales adds to the computational workload.
Convolution operations	Sum wavelet coefficients at different positions and scales, contributing to the computational burden.
Matrix-based operations for the transformation of data	The size and dimensionality of these matrices can significantly impact computation time and memory usage.
Lead to data expansion	This expansion results in larger data volumes.

7. Challenges of Discrete Wavelet Analysis

Challenges of Discrete Wavelet Analysis, in an academic context, refer to the inherent difficulties and limitations associated with the application of wavelet transforms for various signal and image processing tasks. These challenges encompass a range of issues that researchers and practitioners encounter when employing Discrete Wavelet Analysis (DWA). Some of the academic challenges in this context include:

Choosing the most appropriate wavelet basis function [65] for a particular task is a non-trivial challenge. Different wavelets have distinct characteristics and selecting the wrong one can lead to suboptimal results.

DWA operates on multiple scales, and selecting an inappropriate scale can result in either missing essential information or capturing excessive noise. Finding the right scale for analysis can be challenging.

Wavelet transforms are sensitive to the boundaries of the data. Handling edge or boundary effects, which can introduce artifacts, is a common challenge when applying DWA.

DWA is computationally intensive [66], especially when dealing with large or high-dimensional data. This complexity can be a challenge, particularly for real-time or resource-constrained applications. Figure 4 is shown below.

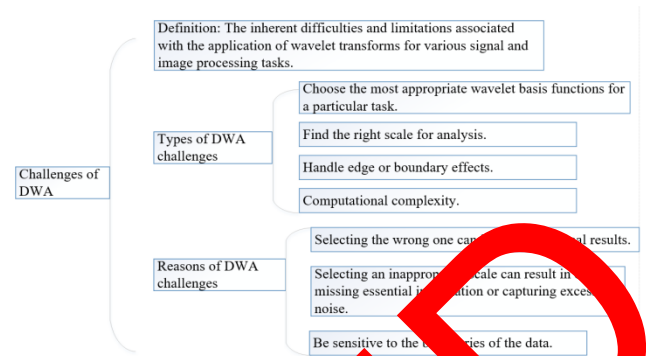


Figure 4 The challenges of DWA

8. Conclusions

In conclusion, "Discrete Wavelet Analysis for Image Segmentation" represents a versatile and powerful approach within the field of computer vision and image processing. This methodology leverages the unique properties of wavelet transforms to partition digital images into coherent and semantically meaningful regions or segments, capturing both high and low-frequency information simultaneously.

The advantages of Discrete Wavelet Analysis for Image Segmentation include its ability to effectively handle multi-scale analysis, enabling the localization of features and boundaries within images. This multi-resolution representation proves invaluable in segmenting images with diverse textures, contrasts, and scales.

However, it is important to acknowledge that this technique is not without its challenges and limitations, including the selection of suitable wavelet basis functions, boundary effects, computational complexity, and noise sensitivity. Addressing these issues requires ongoing academic research to refine and extend Discrete Wavelet Analysis methodologies [67] for image segmentation.

Acknowledgment

We thank all the anonymous reviewers for their hard reviewing work.

Funding

The research work was supported by the open project of State Key Laboratory of Millimeter Waves (Grant No. K202218).

References

- [1] L. T. Thuong, T. T. Nha, and V. Giang, "GRAPH-BASED SIGNAL PROCESSING TO CONVOLUTIONAL NEURAL NETWORKS FOR MEDICAL IMAGE SEGMENTATION," SEATUC journal of science and engineering, vol. 3, no. 1, pp. 9-15, 2022.
- [2] S. S. L. Kumar et al., "Fully-automated, semantic segmentation of whole-body 18F-FDG PET/CT images

EAI Endorsed Transactions on
e-Learning

| Volume 9 | 2023 |

based on data-centric artificial intelligence," *Journal of nuclear medicine: official publication, Society of Nuclear Medicine*, vol. 63, no. 12, 2022, doi: 10.2967/JNUMED.122.264063.

[3] S.-H. Wang, "Polarimetric synthetic aperture radar image segmentation by convolutional neural network using graphical processing units," *Journal of Real-Time Image Processing*, vol. 15, no. 3, pp. 631-642, 2018, doi: 10.1007/s11554-017-0717-0.

[4] M. Bernardo, F. Carlos, S. Samuel, S. Andreia, D. Paulo, and S. B. Sousa, "Are the Instructions Clear? Evaluating the Visual Characteristics of Augmented Reality Content for Remote Guidance," *Multimodal Technologies and Interaction*, vol. 6, no. 10, pp. 92-92, 2022.

[5] M. Ricardo and R. Eduardo, "Removing non-nuclei information from histopathological images: A preprocessing step towards improving nuclei segmentation methods," *Journal of Pathology Informatics*, vol. 14, pp. 100315-100315, 2023.

[6] L. Dan, M. Carol, Z. Cecilia, Z. Fei, and X. Qian, "Wound tissue segmentation by computerised image analysis of clinical pressure injury photographs: a pilot study," *Journal of Wound Care*, vol. 31, no. 8, pp. 710-719, 2022.

[7] Y. Yao, W. Wang, Q. Wu, D. Liu, and J. Zheng, "Guest Editorial: Learning from limited annotations for computer vision tasks," *IET Computer Vision*, vol. 17, no. 5, pp. 509-512, 2023.

[8] J. Chow, T. Palmeri, and I. Gauthier, "Haptic object recognition abilities correlate across feature types and visual object recognition ability," *Journal of Vision*, vol. 22, no. 14, pp. 3260-3260, 2022.

[9] Y. Liu and C. Hubo, "Cost-Efficient Image Semantic Segmentation for Indoor Scene Understanding Using Weakly Supervised Learning and GMM," *Journal of Computing in Civil Engineering*, vol. 37, no. 2, 2023, doi: 10.1061/JCCEE5.CPENG-5065.

[10] T. Amy, "Automated Size Determinations of *Halyomorpha halys* (Stål) (Hemiptera: Pentatomidae) with Simple Image-Based Methodology," *Florida Entomologist*, vol. 105, no. 3, pp. 262-264, 2022.

[11] J. Sun, "DSGA-Net: Deeply separable gated transformer and attention strategy for medical image segmentation network," *Journal of King Saud University - Computer and Information Sciences*, vol. 35, no. 5, p. 101553, 2023/05/06, 2023, doi: <https://doi.org/10.1016/j.jksuci.2023.04.006>.

[12] A. Tahir, Z. Junping, U. Iqbal, G. Y. Yasin, A. Osama, and G. Far, "Multiscale Feature-Learning with a Unified Model for Hyperspectral Image Classification," *Sensors (Basel, Switzerland)*, vol. 23, no. 17, 2023, doi: 10.3390/s2317200274.

[13] F. Yuncong, L. Yunfei, L. Zhicheng, L. Wanru, Y. Qian, and Z. Xiaoli, "A Novel Interval Iterative Multi-Thresholding Algorithm Based on Hybrid Spatial Filter and Region Growing for Medical Brain MR Images," *Applied Sciences*, vol. 13, no. 2, pp. 1087-1087, 2023.

[14] F. Chengcai, L. Fengli, and Z. Guoying, "Gradient-enhanced waterpixels clustering for coal gangue image segmentation," *International Journal of Coal Preparation and Utilization*, vol. 43, no. 4, pp. 677-690, 2023.

[15] Y. Zhang, H. Guo, F. Chen, and H. Yang, "Weighted kernel mapping model with spring simulation based

watershed transformation for level set image segmentation," *Neurocomputing*, vol. 249, pp. 1-18, 2017.

[16] Y. Zepa, C. Insung, C. Juwhan, J. Jongha, R. Minyeong, and Y. H. Seok, "Deep learning-based pectoralis muscle volume segmentation method from chest computed tomography image using sagittal range detection and axial slice-based segmentation," *PloS one*, vol. 18, no. 9, pp. 10273-10292, 2023.

[17] C. S. Woon, B. N. Rae, and P. K. Kyoung, "Deep Learning-based Multi-stage segmentation method using ultrasound images for breast cancer diagnosis," *Journal of King Saud University - Computer and Information Sciences*, vol. 34, no. 10PB, pp. 1946-1957, 2022.

[18] Z. Yawu, W. Shudong, Y. Yulin, Q. Sibor, and Z. Mufei, "WRANet: wavelet integrated residual attention U-Net network for medical image segmentation," *Complex & intelligent systems*, vol. 11-12, 2023.

[19] T. Javid, M. Maris, A. Azad, and P. Akbar, "Integrated representation of discrete Fourier and wavelet transforms using vector notation," *Mehran University Research Journal of Engineering and Technology*, vol. 41, no. 3, pp. 175-184, 2022.

[20] H. K. Kelele, M. E. Kahsay, and T. K. Nielsen, "Dynamic Response Analysis of Wind Turbine Structure to Turbulent Wind Load: Comparative Assessment in Time and Frequency Domains," *Applied Mechanics*, vol. 4, no. 3, pp. 844-855, 2023.

[21] Z. Yu, J. Chen, B. Zhang, D. Wang, and H. Jiang, "Selection Method of Optimal Wavelet Basis Function for Aeromagnetic Anomaly Signal Processing," *Journal of Geomatics Research*, vol. 115, no. sp1, pp. 530-534, 2020.

[22] F. Sajjad, "High-resolution diffusion-weighted imaging at 7 Tesla: single-shot readout trajectories and their impact on signal-to-noise ratio, spatial resolution and accuracy," *NeuroImage*, vol. 274, pp. 120159-120159, 2023.

[23] C. Jagrati, P. A. Kumar, H. Angel, S. P. Dev, P. Chetan, and K. Rakesh, "99m-Tc TRODAT Single-Photon Emission Computerized Tomography Scan Image Compression using Singular Value Decomposition," *Indian journal of nuclear medicine: IJNM: the official journal of the Society of Nuclear Medicine, India*, vol. 38, no. 2, pp. 103-109, 2023.

[24] S. Shen and I. Toshio, "IMPROVING OBJECT FEATURE DETECTION USING POINTCLOUD AND IMAGE FUSION," *SEATUC journal of science and engineering*, vol. 2, no. 1, pp. 28-33, 2021.

[25] Y. Guangji, "Some invariant and inverse invariant characters of information systems under homomorphisms based on data compression," *International Journal of General Systems*, vol. 49, no. 3, pp. 302-333, 2020.

[26] X. Li and X. Ruan, "Discrete Fourier transform based frequency characteristics of iterative learning control for linear discretetime systems," *Advances in Difference Equations*, vol. 2019, no. 1, pp. 1-22, 2019.

[27] O. Agboje, O. Idowu-Bismark, and A. Ibaze, "Comparative Analysis of Fast Fourier Transform and Discrete Wavelet Transform Based MIMO-OFDM," *International Journal on Communications Antenna and Propagation IRECAP*, vol. 7, no. 2, pp. 168-175, 2017.

[28] V. Srivardhan, "Stratigraphic correlation of wells using discrete wavelet transform with fourier transform and multi-scale analysis," *Geomechanics and Geophysics for Geo-Energy and Geo-Resources*, vol. 2, no. 3, pp. 137-150, 2016.

- [29] Y. Zhang, "Magnetic resonance brain image classification based on weighted-type fractional Fourier transform and nonparallel support vector machine," *International Journal of Imaging Systems and Technology*, vol. 25, no. 4, pp. 317-327, 2015, doi: 10.1002/ima.22144.
- [30] S. Wang, "Pathological Brain Detection by a Novel Image Feature—Fractional Fourier Entropy," *Entropy*, vol. 17, no. 12, pp. 8278-8296, 2015.
- [31] L. Lian, R. Wei-Xin, and W. Shi-Dong, "Fractional Fourier transform: Time-frequency representation and structural instantaneous frequency identification," *Mechanical Systems and Signal Processing*, vol. 178, 2022, doi: 10.1016/J.YMSSP.2022.109305.
- [32] K. Pritiranjana and R. K. Chandra, "An Efficient DCT-II Based Harmonic Wavelet Transform for Time-Frequency Analysis," *Journal of Signal Processing Systems*, vol. 94, no. 12, pp. 1381-1394, 2022.
- [33] Y.-D. Zhang, "Computer-aided diagnosis of abnormal breasts in mammogram images by weighted-type fractional Fourier transform," (in English), *Advances in Mechanical Engineering*, Article vol. 8, no. 2, Feb 2016, Art no. 11, doi: 10.1177/1687814016634243.
- [34] G. Saifallah and M. Hatem, "Time-frequency concentration and localization operators associated with the directional short-time fourier transform," *Journal of Pseudo-Differential Operators and Applications*, vol. 13, no. 3, 2022, doi: 10.1007/S11868-022-00465-8.
- [35] G. S. P. et al., "Tracking IMF Fluctuations Nearby Sun Using Wavelet Analysis: Parker Solar Probe First Encounter Data," *Geomagnetism and Aeronomy*, vol. 62, no. 1-2, pp. 138-150, 2022.
- [36] W. Haiming, Y. Shaopu, L. Yongqiang, and L. Qian, "Compressive sensing reconstruction for bearing vibration signal based on improved iterative soft thresholding algorithm," *Measurement*, vol. 210, pp. 168-175, 2023.
- [37] W. Jing, W. Li, S. Miao, L. Jia, and L. Jia, "Application of Boundary Local Feature Scale Adaptive Matching Extension EMD Endpoint Error Suppression Method in Blasting Seismic Wave Signal Processing," *Shock and Vibration*, vol. 2023, 2023, doi: 10.1155/2023/2804539.
- [38] K. Evert, S. Shamrokh, and D. Y. C., "Space-time domain solutions of the wave equation by a non-singular boundary integral method and Fourier transform," *The Journal of the Acoustical Society of America*, vol. 142, no. 2, p. 697, 2017.
- [39] S. Wang, "Detection of Left-Sided and Right-Sided Hearing Loss via Fractional Fourier Transform," *Entropy*, vol. 18, no. 5, 2016, Art no. 94, doi: 10.3390/e18050194.
- [40] Y. Zhang, "Tea Category Identification Using a Novel Fractional Fourier Entropy and Jaya Algorithm," *Entropy*, vol. 18, no. 3, 2016.
- [41] Y. Zhang, "A Multilayer Perceptron Based Smart Pathological Brain Detection System by Fractional Fourier Entropy," *Journal of Medical Systems*, vol. 40, no. 7, p. 173, 2016/06/22 2016, doi: 10.1007/s10916-016-0525-2.
- [42] H. Guosheng, W. Jinjun, and R. Akira, "Orthogonal wavelet multiresolution analysis of the turbulent boundary layer measured with two-dimensional time-resolved particle image velocimetry," *Physical review. E*, vol. 99, no. 5-1, p. 053105, 2019.
- [43] L. N. Wu, "Improved image filter based on SPCNN," (in English), *Science In China Series F-Information Sciences*, Article vol. 51, no. 12, pp. 2115-2125, Dec 2008, doi: 10.1007/s11432-008-0124-z.
- [44] L. N. Wu, "Pattern Recognition via PCNN and Tsallis Entropy," (in English), *Sensors*, Article vol. 8, no. 11, pp. 7518-7529, Nov 2008, doi: 10.3390/s8117518.
- [45] B. Natarajan and P. Krishnan, "Contrast Enhancement Based Image Detection Using Edge Preserved Key Pixel Point Filtering," *COMPUTER SYSTEMS SCIENCE AND ENGINEERING*, vol. 42, no. 2, pp. 423-433, 2022.
- [46] T. T. A. Azevedo, F. A. Dias, d. P. Rogério, L. L. Alves, M. A. Santana, and d. N. M. Zambetta, "A stain color normalization with robust dictionary learning for breast cancer histological images processing," *Biomedical Signal Processing and Control*, vol. 85, 2023, doi: 10.1016/J.BSPC.2023.105178.
- [47] D. Gyanesh, P. Rutturama, S. Sreena, and A. Sanjay, "A Novel Segmentation Error Minimization-Based Method for Multilevel Optimal Threshold Selection Using Opposition Equilibrium Optimizer," *International Journal of Image and Graphics*, vol. 23, no. 12, 2023, doi: 10.1142/S0219467823500213.
- [48] M. Khaled, L. Hengchao, A. Zaid, R. Ali, and M. Asad, "Weakly supervised building semantic segmentation via superpixel-CRF with initial deep seeds guiding," *IET Image Processing*, vol. 16, no. 12, pp. 3258-3267, 2022.
- [49] K. B. Pavan, L. Arvind, and P. Rajoo, "A generic post-processing framework for image dehazing," *Signal, Image and Video Processing*, vol. 17, no. 6, pp. 3183-3191, 2023.
- [50] T. Li, J. Sun et al., "Enhancing PV panel segmentation in remote sensing images with constraint refinement network," *Applied Energy*, vol. 350, 2023, doi: 10.1016/J.APENERGY.2023.121757.
- [51] B. Manoel et al., "An automated method to analyze root filling voids and gaps using confocal microscopy images," *Odontology*, 2023, doi: 10.1007/S10266-023-00859-0.
- [52] Z. Junhua, G. Minghao, C. Pengzhi, L. Yang, C. Jun, and L. Huanxi, "Weld Defect Segmentation in X-ray Image with Boundary Label Smoothing," *Applied Sciences*, vol. 12, no. 24, pp. 12818-12818, 2022.
- [53] S. Pohchoo et al., "Evaluation of Compressed SENSE on Image Quality and Reduction of MRI Acquisition Time: A Clinical Validation Study," *Academic radiology*, 2023, doi: 10.1016/J.ACRA.2023.07.013.
- [54] J. Man, X. Jingmei, Y. Ruoxi, L. Zongan, Z. Ling, and W. Ye, "Three filters for the enhancement of the images acquired from fluorescence microscope and weak-light-sources and the image compression," *Heliyon*, vol. 9, no. 9, pp. A4063-A4083, 2023.
- [55] B. Sebastián et al., "Easy One-Step Amplification and Labeling Procedure for Copy Number Variation Detection," *Clinical chemistry*, vol. 66, no. 3, pp. 463-473, 2020.
- [56] E. Mohammad, T. Solale, and A. Malek, "A unique color-coded visualization system with multimodal information fusion and deep learning in a longitudinal study of Alzheimer's disease," *Artificial Intelligence In Medicine*, vol. 140, pp. 102543-102543, 2023.
- [57] J. Jeong, Y. H. Yoon, and J. H. Park, "Reliable Road Scene Interpretation Based on ITOM with the Integrated Fusion of Vehicle and Lane Tracker in Dense Traffic Situation," *Sensors*, vol. 20, no. 9, p. 2457, 2020.
- [58] Y. Jinsoo, L. Seongjin, L. Wontaek, and S. Myounggho, "Human-like Decision-Making System for Overtaking

- Stationary Vehicles Based on Traffic Scene Interpretation," *Sensors*, vol. 21, no. 20, pp. 6768-6768, 2021.
- [59] L. Chun, Y. Jian, Z. Jiangbin, and N. Xuan, "An Unsupervised Port Detection Method in Polarimetric SAR Images Based on Three-Component Decomposition and Multi-Scale Thresholding Segmentation," *Remote Sensing*, vol. 14, no. 1, pp. 205-205, 2022.
- [60] N. V. Glukhova, "Method for Determining the Measurement Uncertainty of the Detailing Coefficients of the Wavelet Transform of Image Brightness Profiles," *Measurement Techniques*, vol. 63, no. 3, pp. 177-183, 2020.
- [61] S. C. Kosaraju, J. Hao, H. M. Koh, and M. Kang, "Deep-Hipo: Multi-scale receptive field deep learning for histopathological image analysis," *Methods*, vol. 179, no. prepublish, pp. 3-13, 2020.
- [62] Q. Zhe et al., "A reconstruction and convolution operations enabled variant vision transformer with gastroscopic images for automatic locating of polyps in Internet of Medical Things," *Information Fusion*, vol. 101, 2024, doi: 10.1016/J.INFFUS.2023.102007.
- [63] B. Piyalee and D. Arighna, "Design Space Exploration of Matrix–Matrix Convolution Operation," *Journal of*

- Circuits, Systems and Computers*, vol. 30, no. 16, 2021, doi: 10.1142/S0218126621502881.
- [64] Z. Peijia and H. Jiwu, "Discrete wavelet transform and data expansion reduction in homomorphic encrypted domain," *IEEE transactions on image processing: a publication of the IEEE Signal Processing Society*, vol. 22, no. 6, pp. 2455-68, 2013.
- [65] S. Debabrata, B. Sayan, and M. P. Madan, "Efficient interpolating wavelet collocation scheme for quasi-exactly solvable Sturm–Liouville problems in $\mathbb{R}^+$," *Mathematical Methods in the Applied Sciences*, vol. 45, no. 7, pp. 4001-4023, 2022.
- [66] F. Jiahui, Q. Jingze, L. Yuchang, D. Liyuan, and L. Zhong, "A task processing efficiency improvement scheme based on Cloud-Edge architecture in computationally intensive scenarios," *Journal of Parallel and Distributed Computing*, vol. 181, 2023, doi: 10.1016/J.PDPC.2023.102042.
- [67] Z. Zhang, "The Improvement of the Discrete Wavelet Transform," *Mathematics*, vol. 11, no. 8, 2023, doi: 10.3390/MATH11081770.